

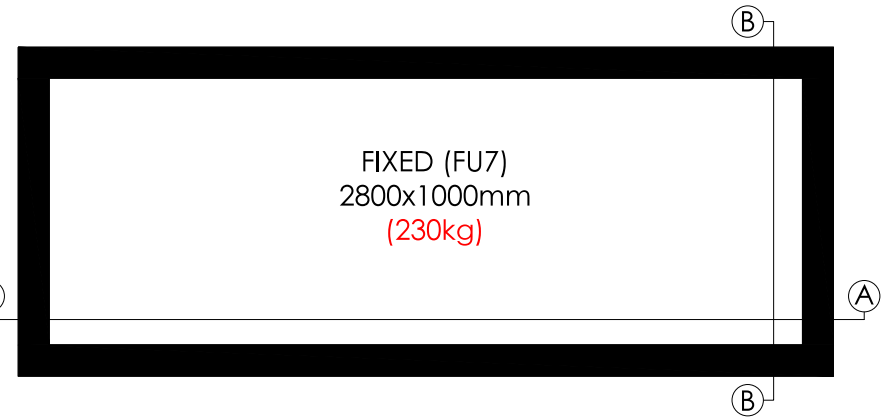
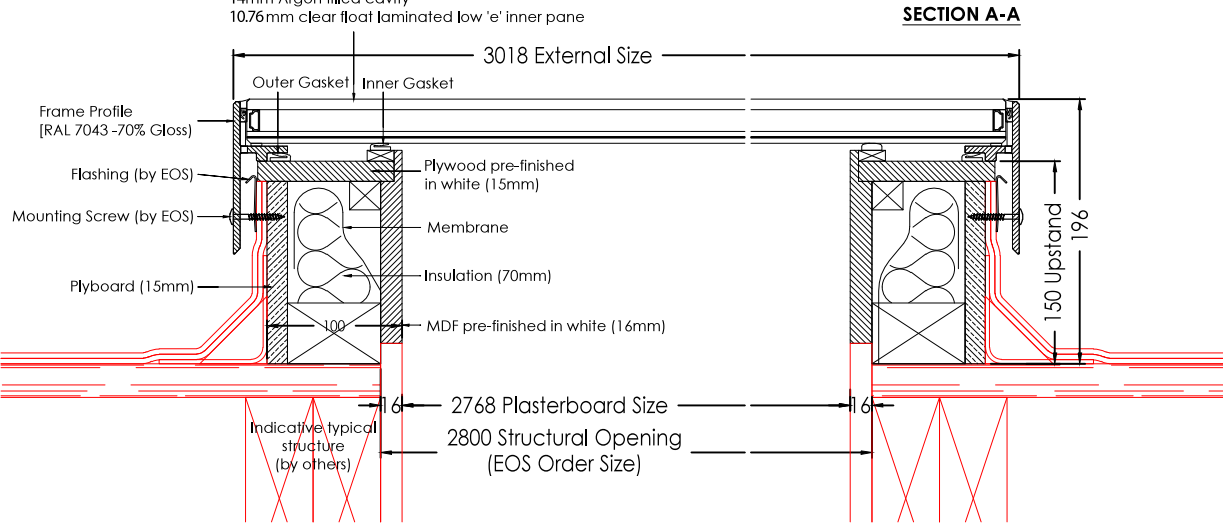




32mm double glazed unit comprising of:
 8mm clear toughened outer pane
 14mm Argon filled cavity
 10.76mm clear float laminated low 'e' inner pane

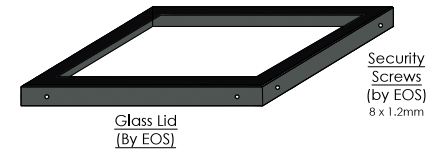

Installation Procedure
 (See specific installation sheet for more details)

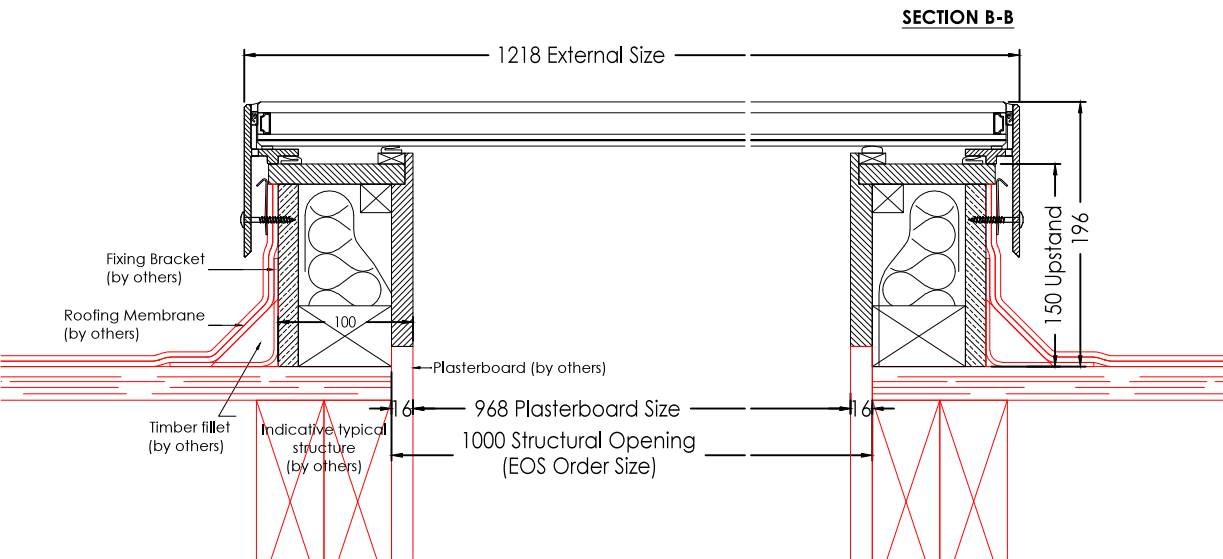

Key:
 — by others

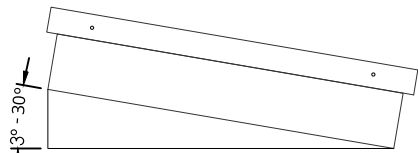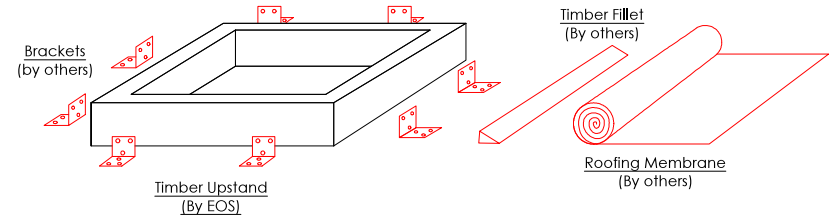

Rooflight must be installed on a roof pitch between 3-30° (by others). Failure to do so will result in water pooling on the rooflight.



Drawing Title
 2800x1000mm (FU7)
 Fixed Rooflight + upstand
 scale 1:4 @ A3
 drawing no. EOS.FU7.002
 date Aug '13

0
 revision

This drawing is copyright and may not be reproduced either in part or full without written permission from EOS Rooflights.
 DO NOT SCALE OFF THIS DRAWING