




Rooflight must be installed on a roof pitch between 3-15° (by others). Failure to do so will result in water pooling on the rooflight.




32mm double glazed unit comprising of:  
 8mm clear toughened outer pane  
 16mm Argon filled cavity  
 8.8mm clear float laminated low 'e' inner pane

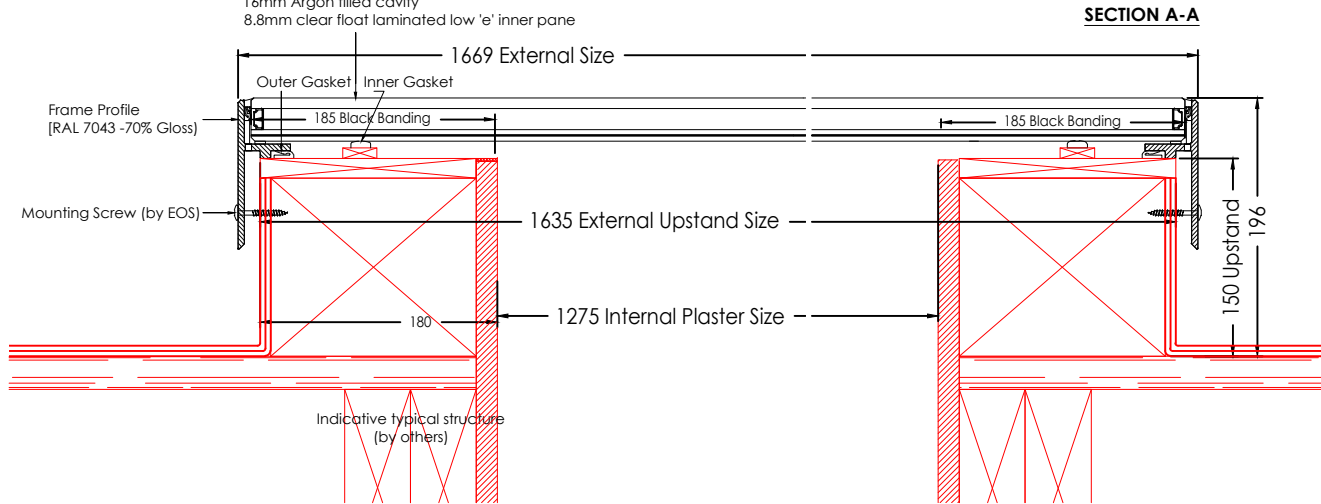


Indicative typical structure (by others)

**SECTION A-A**

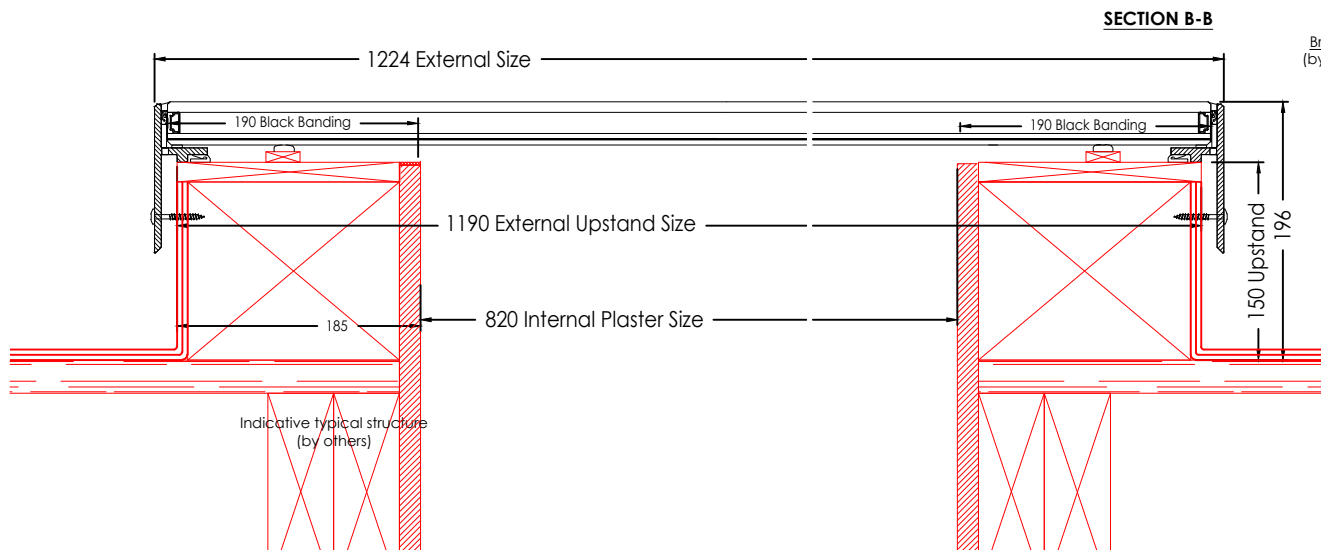


Indicative typical structure (by others)


**SECTION B-B**

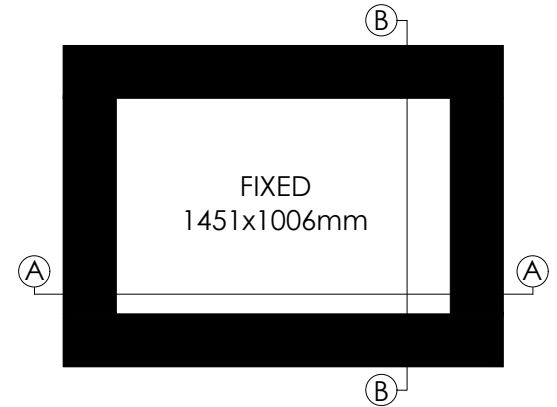

**Installation Procedure**  
 (See specific installation sheet for more details)

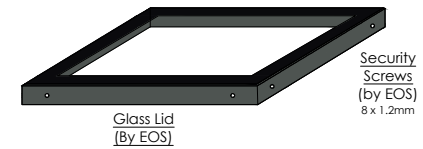

**Key:**  
 — by others

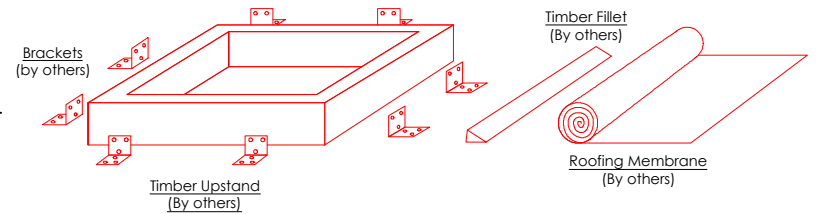

Drawing Title		0
1451x1006mm Fixed Rooflight		
scale	1:4 @ A3	revision
drawing no.	S 5	
date	20.12.18	