



Beautifully crafted rooflights
for **beautiful** living spaces




EOS97
Fixed, Opening & Modular Rooflight



EOS97 Rooflight

High Performance roof glazing for flat and low pitched roofs. Featuring market leading thermal efficiency and exceptional safety levels.

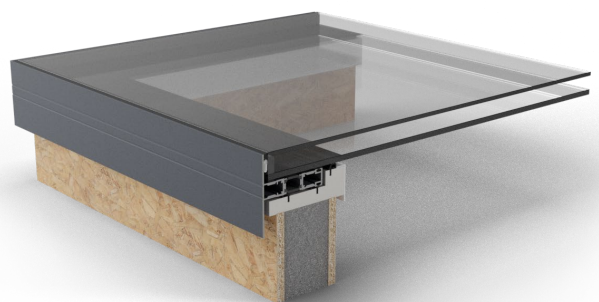

EOS97 - Fixed Rooflight

Are you looking for a high performing rooflight for your next project? Explore our top of the range fixed rooflight.

- Double glazed 'System' U-value from 0.88 W/m²K
- Triple Glazed U-value as low as 0.66 W/m²K
- Thermally broken aluminium frame
- Heat Soak Tested toughened outer pane as standard.
- Laminate inner pane throughout the range
- Supplied with a fully insulated timber upstand, including internal plasterboard rebate.
- Upstands can be manufactured either flat or with a 5 degree pitch (suitable for both cold and warm roofs)
- Huge range of glass options to choose from.
- Proudly manufactured in the UK.



Laminate safety glass as standard

When broken laminate glass stays intact rather than breaking into small shards

Internal stop bead

Aluminium plasterboard reveal for an internal frameless appearance.

Black border as standard

Heat Soak Tested

Reduces the chance of breakages compared to standard toughened glass.

Thermally broken Aluminium profile

Ral 7016 as standard or choose a bespoke colour.


Insulated upstand

Includes a fully assembled, fully insulated upstand as standard.

EOS97 - Opening Rooflight

Sleek contemporary design coupled with exceptional thermal performance.

- Double glazed U-value of 0.92 W/m²K.
- Triple Glazed U-value of 0.66 W/m²K.
- Integrated motor installed within insulated upstand.
- Heat Soak Tested toughened outer pane.
- Safety laminate glass on all units as standard.
- Includes a fully compliant upstand either 150mm high (cold roofs) or 300mm (warm roofs).
- Upstand available with either flat or 5 degrees pitch.
- Options include switch, remote, rain sensor and weather station.
- Proudly manufactured in the England

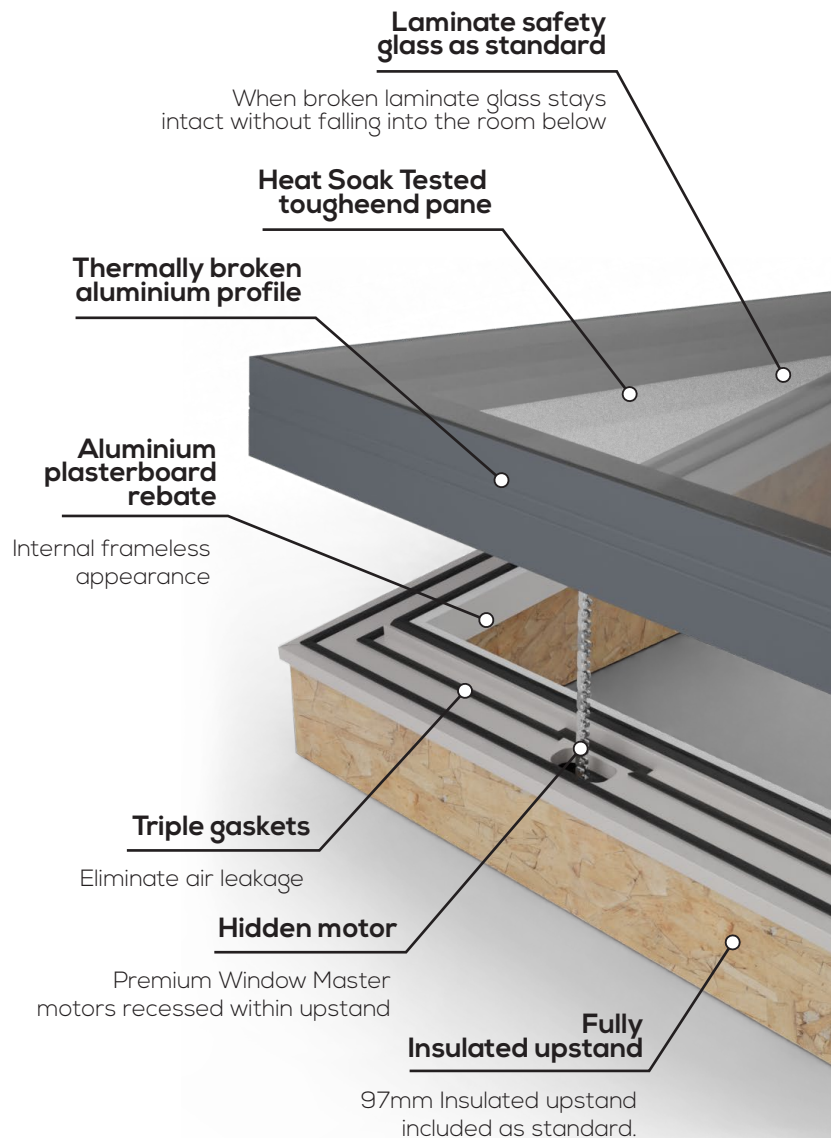

EOS97 - Modular Rooflight

Fixed and Opening sections sit side by side with no visual difference from either inside or out.

- Double glazed 'System' U-values from 0.92 W/m²K.
- Triple glazed 'System' U-values as low as 0.66 W/m²K.
- Identical site lines between fixed and opening modules.
- Heat Soak Tested toughened outer pane
- Laminate inner pane for increased safety and security levels.
- Includes purpose built insulated upstand for improved U values.
- Suitable for flat roofs with a pitch between 0 and 15 degrees.
- Huge range of glass upgrades available.
- Manufactured by EOS in our UK factory.

