


PRODUCT DESCRIPTION

Our EOS WalkOn rooflight is a fixed roof light suitable for situations that requires pedestrian traffic. The WalkOn uses a 50mm double glazed unit to support a load of up to 500kg per m².

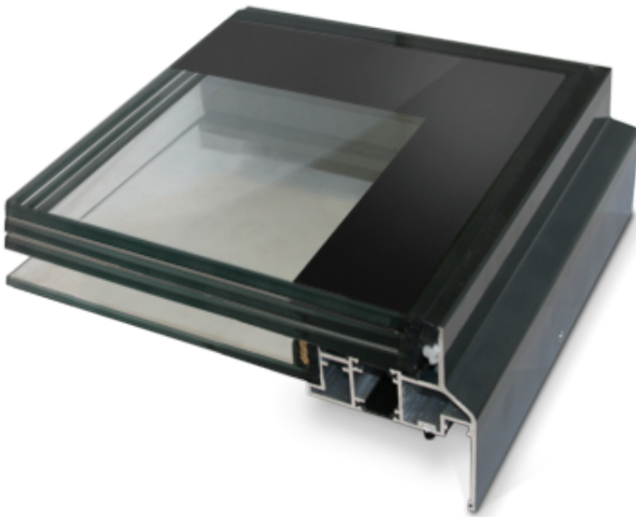

MATERIAL

Our WalkOn rooflight is constructed from glass and aluminium.

GLASS TYPE

EOS WalkOn rooflights are supplied with double glazed super low 'e' coated units with Argon filled cavity. Our standard glass specification is ;

- 52mm double glazed unit.
- 33mm laminated outer pane, 14mm argon filled cavity and 6mm Toughened super Low E inner pane.

U VALUE

U-value as low as 0.9 W/m²K.*

DIMENSIONS, POSSIBILITIES & LIMITATIONS

Bespoke sizes available.

- Min Sizes 400mm x 400mm
- Max Sizes 2500mm x 3200mm (dependant on glass specification)

WARRANTY

EOS WalkOn rooflights come with a 10 year warranty. Our WalkOn rooflights conform to the most up-to-date regulations and is CE marked according to;

Non-Fragility: CWCT Class O Compliant Rooflights
BS 6375-1:2015+A1:2016 Weathertightness
BS EN 1026:2016 Air Permeability
BS EN 1027:2016 Watertightness
BS EN 12211:2016 Wind Resistance

* U-values are calculated according to EN14351 (part of CE standard).

About EOS

EOS Rooflights was set up with the aim of providing high performance roof glazing direct to market.

Our extensive product range includes Fixed, Opening, Walk-On, Modular and Frameless Lanterns.

**T: 0208 462 3557 E: hello@eosrooflights.co.uk
www.eosrooflights.co.uk**